



PANELMONTERAD SUMMER

813500313

ESM Summer 230 V AC IP65 (E5377581)

- Panelmonterad summer med högt ljud
- Justerbar volym
- 3 valbara ljudsignaler
- För montering i borrhål 22,5 mm eller 30,5 mm



PRODUKTBESKRIVNING

Panelmonterad summer med ett brett spänningsområde och hög kapslingsklass, IP65. Utmärkt när man vill påkalla extra uppmärksamhet i en panel.

TEKNISK DATA


Antal tillvalsmoduler	0 st
Antal toner	2 st
Diameter	45 mm
Färg hus	Svart
IP-klass	IP65
Kabelingång	Terminal
Ljudnivå max	100 dB
Ljudnivå min	85 dB
Matningsspänning AC max	260 V AC
Matningsspänning AC min	150 V AC
Nominell ström max	0,04 A
Nominell ström min	0,04 A
Plintanslutning	2,5 mm ²
Strömförbrukning max	0,04 A
Temperaturområde från	-25 °C

Temperaturområde till	60 °C
Tonfrekvens max	3300 Hz
Tonfrekvens min	50 Hz
Vikt	35 g

Tone table

Tone on terminals			
1st	2nd	3rd	
X	X	X	pulling tone
X	X	X	continuous tone

ESM

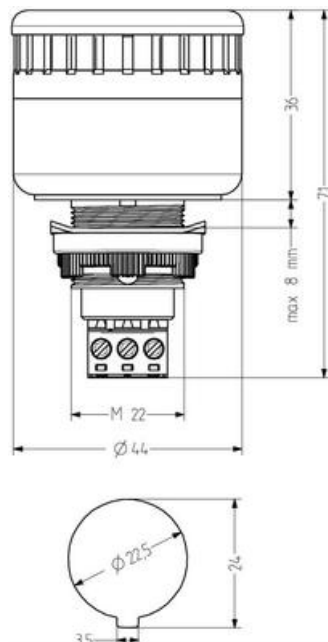

The sound pressure decreases by 6 dB when doubling the distance; the following distance table is to be seen as indication, as also factors like tone type, wind speed, wind direction, humidity, weather conditions etc. do influence the sound pressure level.

Distance (m)	Sound pressure dB (A)															
1	65	70	75	80	85	90	92	94	96	98	100	102	104	106	108	110
2	59	64	69	74	79	84	86	88	90	92	94	96	98	100	102	104
3	55	60	65	70	75	80	82	84	86	88	90	92	94	96	98	100
5	51	56	61	66	71	76	78	80	82	84	86	88	90	92	94	96
10	45	50	55	60	65	70	72	74	76	78	80	82	84	86	88	90
20	39	44	49	54	59	64	66	68	70	72	74	76	78	80	82	84
30	35	40	45	50	55	60	62	64	66	68	70	72	74	76	78	80
40	33	38	43	48	53	58	60	62	64	66	68	70	72	74	76	78
50	31	36	41	46	51	56	58	60	62	64	66	68	70	72	74	76
100																
200																
500																

The sound pressure decreases by 6 dB when doubling the distance



Justerbar volym
med hjälp av
potentiometer,
(ej ESK.)

