



PANELMONTERAD SUMMER

814500405

ESG Summer 24 V AC/DC IP65

- Panelmonterad summer med högt ljud
- Justerbar volym
- 3 valbara ljudsignaler
- För montering i borrhål 22,5 mm eller 30,5 mm



PRODUKTBESKRIVNING

Panelmonterad summer med ett brett spänningsområde och hög kapslingsklass, IP65. Utmärkt när man vill påkalla extra uppmärksamhet i en panel.

TEKNISK DATA


Antal tillvalsmoduler	0 st
Antal toner	3 st
Diameter	65 mm
Färg hus	Svart
IP-klass	IP65
Kabelingång	Terminal
Ljudnivå max	105 dB
Ljudnivå min	85 dB
Matningsspänning AC/DC max	24 V
Matningsspänning AC/DC min	8 V
Nominell ström max	0,057 A
Nominell ström min	0,057 A
Plintanslutning	2,5 mm ²
Strömförbrukning max	0,057 A
Temperaturområde från	-25 °C

Temperaturområde till	60 °C
Tonfrekvens max	3300 Hz
Vikt	65 g

Tone table

Tone per harmonisk			
La	N	Lb	
X	X		pulling tone
X	X	X	wailing tone
X	X	X	continuous tone

ESG

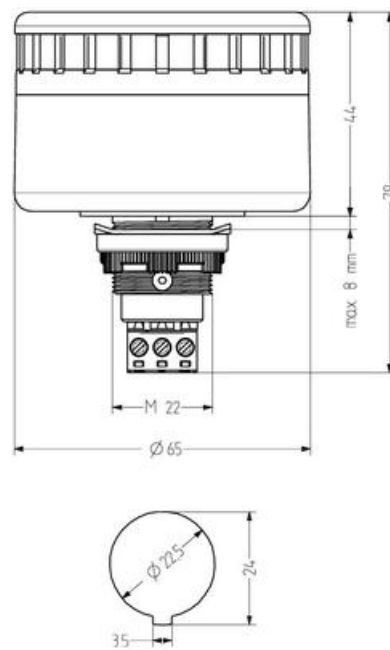

The sound pressure decreases by 6 dB when doubling the distance; the following distance table is to be seen as indication, as also factors like tone type, wind speed, wind direction, humidity, weather conditions etc. do influence the sound pressure level.

Distance (m)	Sound pressure dB (A)															
1	65	70	75	80	85	90	92	94	96	98	100	102	104	106	108	110
2	59	64	69	74	79	84	86	88	90	92	94	96	98	100	102	104
3	55	60	65	70	75	80	82	84	86	88	90	92	94	96	98	100
5	51	56	61	66	71	76	78	80	82	84	86	88	90	92	94	96
10	45	50	55	60	65	70	72	74	76	78	80	82	84	86	88	90
20	39	44	49	54	59	64	66	68	70	72	74	76	78	80	82	84
30	35	40	45	50	55	60	62	64	66	68	70	72	74	76	78	80
50	30	35	40	45	50	55	57	59	61	63	65	67	69	71	73	75
100																
200																
500																

The sound pressure decreases by 6 dB when doubling the distance



Justerbar volym med hjälp av potentiometer, (ej ESK.)

