



PANELMONTERAD SUMMER

814500313

ESG Summer 230 V AC IP65

- Panelmonterad summer med högt ljud
- Justerbar volym
- 3 valbara ljudsignaler
- För montering i borrhål 22,5 mm eller 30,5 mm



PRODUKTBESKRIVNING

Panelmonterad summer med ett brett spänningsområde och hög kapslingsklass, IP65. Utmärkt när man vill påkalla extra uppmärksamhet i en panel.

TEKNISK DATA



Antal tillvalsmoduler	0 st
Antal toner	3 st
Diameter	65 mm
Färg hus	Svart
IP-klass	IP65
Kabelingång	Terminal
Ljudnivå max	105 dB
Ljudnivå min	85 dB
Matningsspänning AC max	260 V AC
Matningsspänning AC min	150 V AC
Nominell ström max	0,044 A
Nominell ström min	0,044 A
Plintanslutning	2,5 mm ²
Strömförbrukning max	0,044 A
Temperaturområde från	-25 °C

Temperaturområde till	60 °C
Tonfrekvens max	3300 Hz
Tonfrekvens min	50 Hz
Vikt	65 g

Tone table

Tone anfordringar			
La	N	Lb	
X	X	X	pulling tone
X	X	X	variable tone
X	X	X	continuous tone

ESG

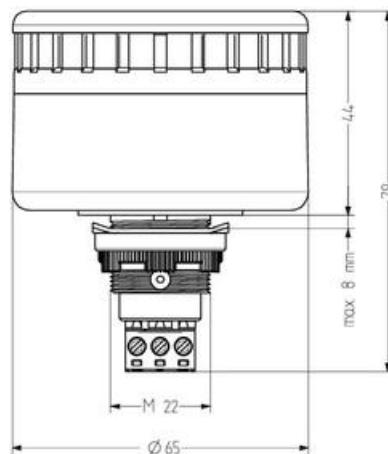

The sound pressure decreases by 6 dB when doubling the distance; the following distance table is to be seen as indication, as also factors like tone type, wind speed, wind direction, humidity, weather conditions etc. do influence the sound pressure level.

Distance (m)	Sound pressure dB (A)															
1	65	70	75	80	85	90	92	94	96	98	100	102	104	106	108	110
2	59	64	69	74	79	84	86	88	90	92	94	96	98	100	102	104
3	55	60	65	70	75	80	82	84	86	88	90	92	94	96	98	100
5	51	56	61	66	71	76	78	80	82	84	86	88	90	92	94	96
10	45	50	55	60	65	70	72	74	76	78	80	82	84	86	88	90
20	39	44	49	54	59	64	66	68	70	72	74	76	78	80	82	84
30	35	40	45	50	55	60	62	64	66	68	70	72	74	76	78	80
50	31	36	41	46	51	56	58	60	62	64	66	68	70	72	74	76
100	27	32	37	42	47	52	54	56	58	60	62	64	66	68	70	72
200	23	28	33	38	43	48	50	52	54	56	58	60	62	64	66	68
500	19	24	29	34	39	44	46	48	50	52	54	56	58	60	62	64

The sound pressure decreases by 6 dB when doubling the distance



Justerbar volym
med hjälp av
potentiometer,
(ej ESK.)

