


MIKROBRYTARE SERIE V4

83170002

Mikrobrytare V4 växlande kontakt W2 anslutning

- Märkdata 0,1-10 A/250 V AC
- Multiström 1 mA 4 V DC
- Manöverarm kan monteras i två olika positioner


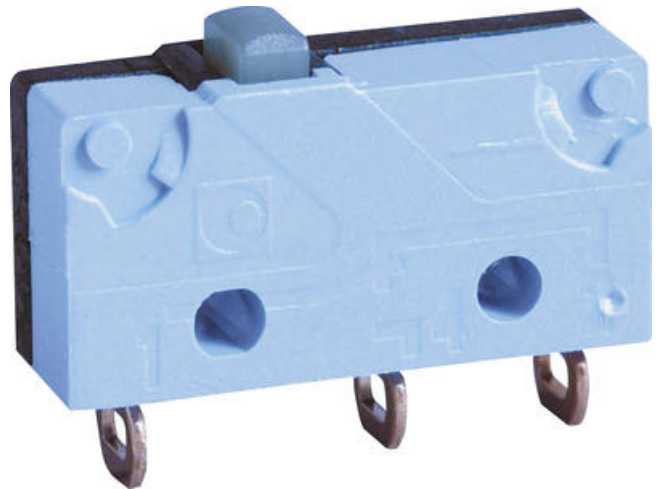


PRODUKTBESKRIVNING


TEKNISK DATA

Anslutning	W2
Hysteres max	0,15 mm
IP-klass	IP40
Kontaktgap	0,4 mm
Kontakttyp	Växlande kontakt
Livslängd mekanisk	10 ⁷ operationer (utan last)
Manöverkraft max	1,5 N
Märkström vid 250 V AC	10 A
Returrörelsekraft min	0,3 N
Rörelsekraft total max	1,8 N
Temperaturområde från	-40 °C
Temperaturområde till	125 °C
Termisk märkström vid 250 V AC	12,5 A
Tillslagspunkt	8,4 ±0,3 mm
Tillåten överrörelsekraft max	10 N
Viloläge max	9,2 mm
Överrörelse min	0,5 mm


W2

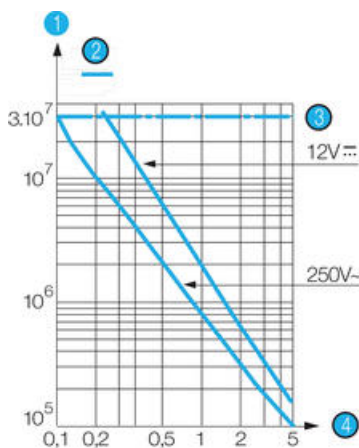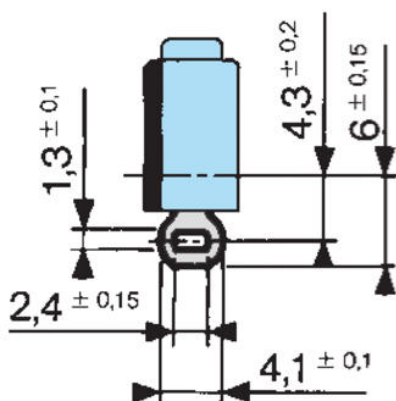

- 1 Number of cycles
- 2 Resistive load
- 3 Mechanical life
- 4 Current (A)

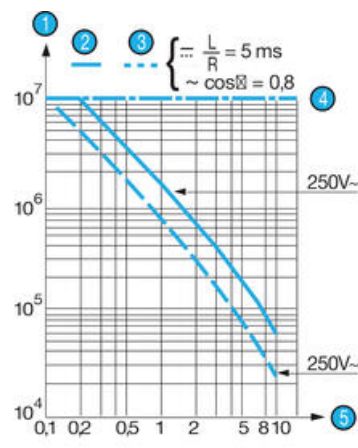

- 1 Number of cycles
- 2 Resistive load
- 3 Inductive load
- 4 Mechanical life
- 5 Current (A)

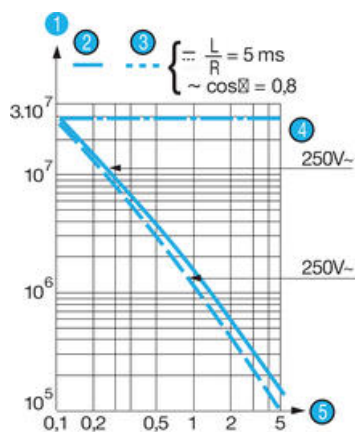

- 1 Number of cycles
- 2 Resistive load
- 3 Inductive load
- 4 Mechanical life
- 5 Current (A)

Electrical function

Partially




Breaking



Conclusion




83 170
Asymmetric version

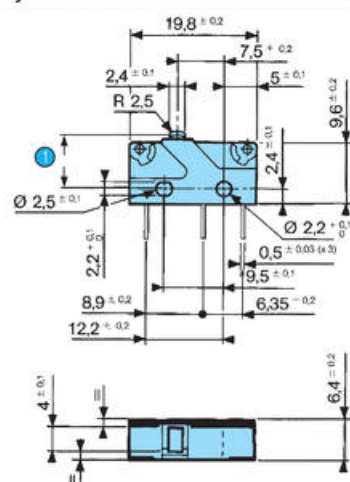


1 OL = 7.6


Mounted with M2 screws
Recommended tightening torque: 2 cm daN

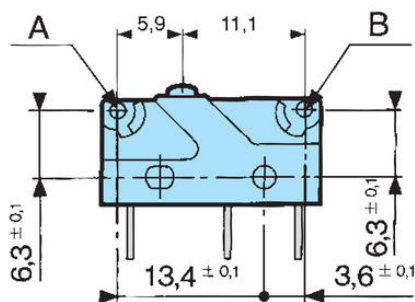


W2




W7A5




X1 - X1S




X2 - X2S




X3 - X3S




83 170 Symmetrical version

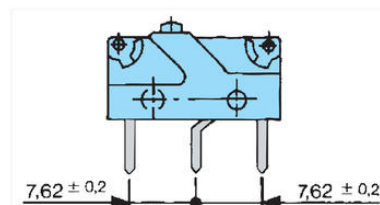

170 E
Arm with roll

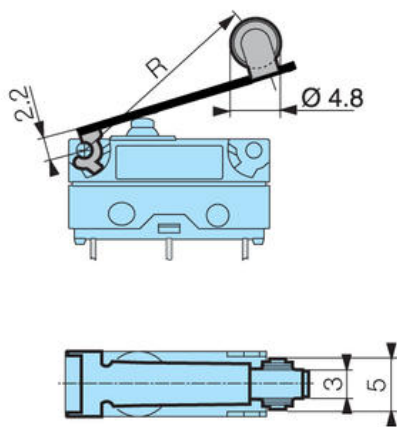

170 A
Straight-arm

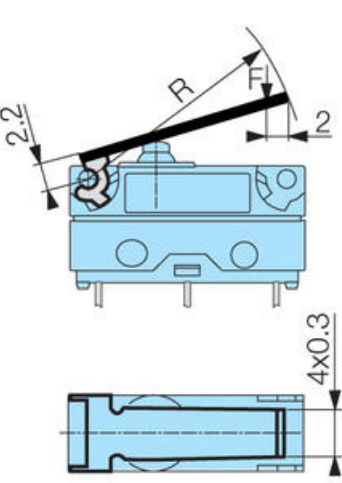

170 F
Arm with simulated scroll

