


KULVENTIL, 2-VÄGS, AUTOMATISK BVA23

BVA23FF100SST

- 3-delat utförande
- Fullt genomlopp
- Fläns-, svets-, eller gänganslutning
- Toppfläns enl. EN ISO 5211
- För pneumatiskt eller elektriskt manöverdon

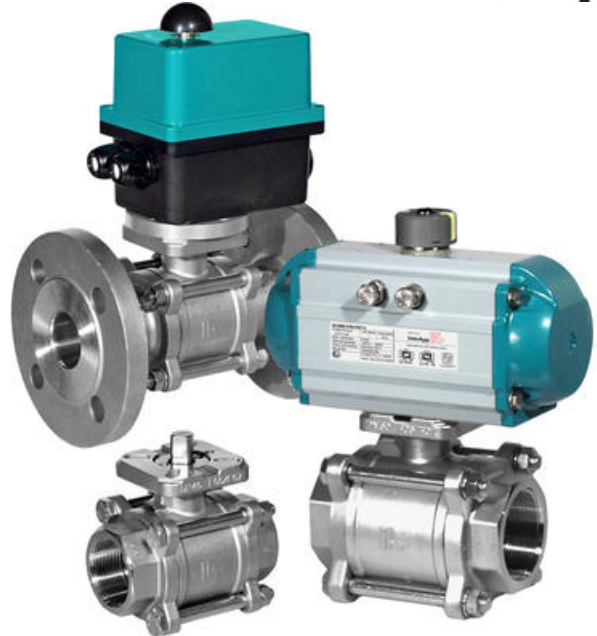

PRODUKTBESKRIVNING

2-vägs kulventil i rostfritt stål med 3-delad ventilkropp för enklare montage och service.
Fullt genomlopp och toppfläns enligt EN ISO 5211 för montering av pneumatiska eller elektriska manöverdon.
Ventilen är lämplig för ON/OFF funktion och reglering av vatten, oljor, gaser eller ånga.

YTTERLIGARE INFORMATION::

- Material: rostfritt stål / PTFE
- Processanslutningar: fläns-, gänga- eller svetsanslutning



TEKNISK DATA


Dimension	100 DN
Kv vid 90°	1414 m³/h
Material Packing	PTFE
Montering	Fläns enl. DIN 3202-F1
Toppfläns	ISO 5211
Ventilhus	CF8M (1.4408)
Vikt	34,9 kg

Product features

- Connection
(Face to face dimension)


BVA23FT threaded ends DIN EN 10226-1
Rp½" - 4" (DIN 3202-M3)
BVA23FB butt weld ends
DN10-100 (DIN 3202-S13)
BVA23FL butt weld ends long
DN15-100
BVA23FF flanged ends PN40
DN15-100 (DIN 3202-F1)
- Max. working pressure
Temperature range

63 bar (BVA23FF 40bar)
-20°C + 160°C, Versions for lower
temperatures on request

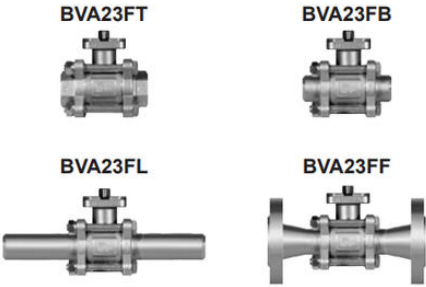

Construction

1	3-piece body	CF8M (1.4408)
2	Ball	ASS 316 (1.4401)
3	Seat ring white (standard)	PTFE + 15% GF
3	Seat ring grey (for steam)	PTFE + 40-20% Carbon
4	Seat ring	PTFE
5	Washer	PTFE
6	Stem seal self-adjusting with bevel washer (for approx. 30.000 cycles)	PTFE
7	Stem	ASS 316 (1.4401)
8	Chand nut	ASS 304 (1.4301)
9	Seal ring	Viton
10	Chand ring	ASS 304 (1.4301)
11	Bevel washer	Spring steel



BVA23FB



	DN	RP	LT	H	S	ISO	Weight	kg
BVA23FB 1/2 S13	15	15	10	40	7	F10-04	6	1,35
BVA23FB 1/2 S13	20	20	10	40	7	F10-04	6	1,35
BVA23FB 1/2 S13	25	25	10	40	7	F10-04	6	1,35
BVA23FB 1/2 S13	32	32	10	40	7	F10-04	6	1,35
BVA23FB 1/2 S13	40	40	10	40	7	F10-04	6	1,35
BVA23FB 1/2 S13	50	50	10	40	7	F10-04	6	1,35
BVA23FB 1/2 S13	63	63	10	40	7	F10-04	6	1,35
BVA23FB 1/2 S13	80	80	10	40	7	F10-04	6	1,35
BVA23FB 1/2 S13	100	100	10	40	7	F10-04	6	1,35
BVA23FB 400 S13	4	100	120	138	24	F10	1414	22,5

BVA23FL




	DN	RP	LT	H	S	ISO	Weight	kg
BVA23FL 1/2 S13	15	20	120	40	7	F10-04	18	3,72
BVA23FL 1/2 S13	20	25	120	40	7	F10-04	18	3,72
BVA23FL 1/2 S13	25	32	120	40	7	F10-04	18	3,72
BVA23FL 1/2 S13	32	40	120	40	7	F10-04	18	3,72
BVA23FL 1/2 S13	40	50	120	40	7	F10-04	18	3,72
BVA23FL 1/2 S13	50	63	120	40	7	F10-04	18	3,72
BVA23FL 1/2 S13	63	80	120	40	7	F10-04	18	3,72
BVA23FL 1/2 S13	80	100	120	40	7	F10-04	18	3,72
BVA23FL 1/2 S13	100	125	120	40	7	F10	1414	22,5

BVA23FF



	DN	RP	LT	H	S	ISO	Weight	kg
BVA23FF 1/2 S13	15	15	40	21	7	F10-04	6	1,35
BVA23FF 1/2 S13	20	20	40	21	7	F10-04	6	1,35
BVA23FF 1/2 S13	25	25	40	21	7	F10-04	6	1,35
BVA23FF 1/2 S13	32	32	40	21	7	F10-04	6	1,35
BVA23FF 1/2 S13	40	40	40	21	7	F10-04	6	1,35
BVA23FF 1/2 S13	50	50	40	21	7	F10-04	6	1,35
BVA23FF 1/2 S13	63	63	40	21	7	F10-04	6	1,35
BVA23FF 1/2 S13	80	80	40	21	7	F10-04	6	1,35
BVA23FF 1/2 S13	100	100	40	21	7	F10-04	6	1,35
BVA23FF 400 S13	4	100	120	138	24	F10	1414	22,5

BVA23FF



	DN	RP	LT	H	S	ISO	Weight	kg
BVA23FF 1/2 S13	15	15	10	104	10	F10-04	10	2,45
BVA23FF 1/2 S13	20	20	10	104	10	F10-04	10	2,45
BVA23FF 1/2 S13	25	25	10	104	10	F10-04	10	2,45
BVA23FF 1/2 S13	32	32	10	104	10	F10-04	10	2,45
BVA23FF 1/2 S13	40	40	10	104	10	F10-04	10	2,45
BVA23FF 1/2 S13	50	50	10	104	10	F10-04	10	2,45
BVA23FF 1/2 S13	63	63	10	104	10	F10-04	10	2,45
BVA23FF 1/2 S13	80	80	10	104	10	F10-04	10	2,45
BVA23FF 1/2 S13	100	100	10	104	10	F10-04	10	2,45
BVA23FF 400 S13	4	100	120	138	24	F10	1414	22,5