

Filterless enclosure cooling unit KG 4266-230V



Product Features


Brand Name:	SoliTherm SlimLine
Order Number:	42660001
Color:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress protection:	IP 54
Optional:	In stainless steel order no. 4266002
Approvals:	CE, cURus, cULus
UL File Nummer:	cURus (SA32278), cULus (E498756)
Accessories:	NEMA 4X cover
Taric Code:	84158200

Technical data KG 4266-230V

Cooling capacity L35L35:	320 W @ 50 Hz 330 W @ 60 Hz
Cooling capacity L35L50:	140 W @ 50 Hz 150 W @ 60 Hz
Compressor:	Rotary piston compressor
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	105 g / 3.7 oz
High / low pressure:	20 / 13 bar 290 / 188 psig
Operating temperature range:	+10°C - +50°C
Air volume flow (system / unimpeded):	Ambient air circuit: 170 / 250 m³/h Cabinet air circuit: 125 / 250 m³/h
Mounting:	Wall mounted / Recessed
Dimension H x W x D:	520 x 270 x 110 mm
Weight:	13 kg
Cut out dimensions:	501 x 251 mm
Voltage / Frequency:	230 V ~ 50/60 Hz
Current L35L35:	1.5 A @ 50 Hz 1.6 A @ 60 Hz
Starting current:	3.2 A
Max. current:	1.8 A
Nominal power L35L35:	315 W @ 50 Hz 335 W @ 60 Hz
Max. power:	375 W
Fuse:	6 A (T)
Connection:	Connection terminal block


Please click on the graphics to download.
 More CAD drawings can be found under [Product Download](#).
 > [Overview product group Cabinet cooling units - SlimLine](#)

Performance Graph:

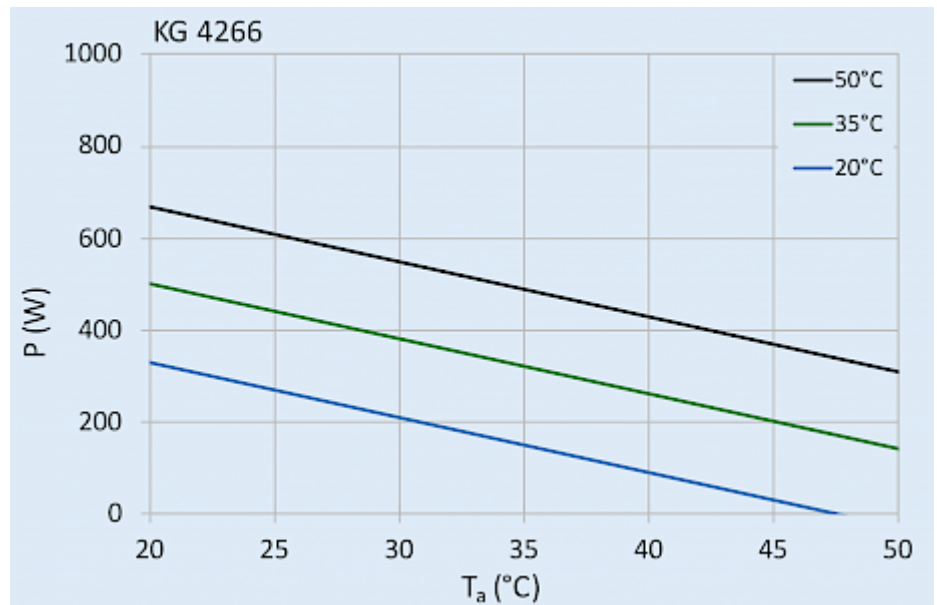


[click image to enlarge](#)

Air flow:

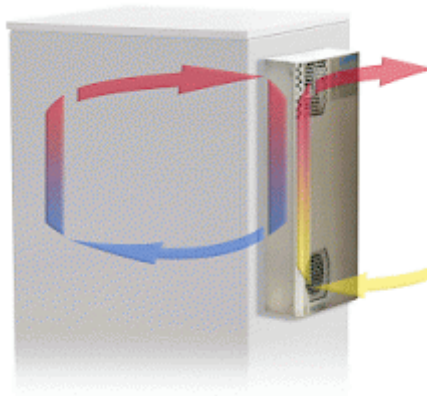

[click image to enlarge](#)

Cut out dimensions:

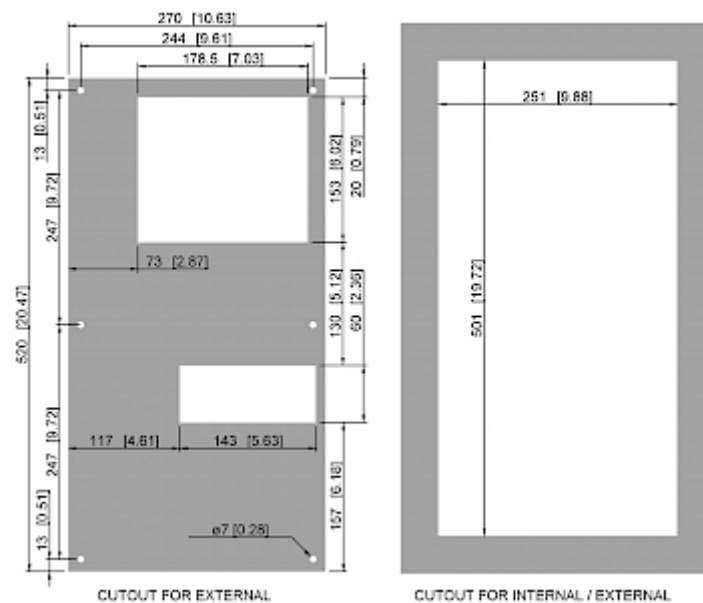

[click image to enlarge](#)