

Linear measuring technology

Draw wire mechanics for outdoor applications	Draw wire encoder D120	Measuring length up to 10 m Linearity up to ± 0.1 %
---	-------------------------------	---



Their extremely robust construction, their high IP69k protection level and their wide temperature range make these new draw wire encoders particularly reliable and durable. Their flexibility and adaptability reflects in the wide range of housing and wire types, the long measuring range and the various interfaces. The possibility of redundancy must be particularly pointed out.



Analog
output

CANopen



Robust

- Protection level up to IP69k and wide temperature range from -40°C ... +85°C.
- The titanium-anodized aluminum housing and the stainless steel wires allow using the mechanics even in harsh conditions.
- Wire diameter (stainless steel, V4A) up to $\varnothing$ 1.5 mm - ideal for outdoor applications.

Versatile

- Measuring length up to 10 m.
- Redundant outputs (mA, V, R, CANopen).
- The right measuring wire and the right wire fastening for every application.
- Linearity up to ± 0.1 % of the measuring range.
- Various constructions: open, closed housing or housing with perforated sheet steel cover.

Order code		D8.D120 . XXXX . XXXX . 0000						Standard variants are represented <u>bold underlined</u>	
		Type	a	b	c	d	e		
a	Measuring length							e	Sensor type
	3 = 3 m								A11 = 4 ... 20 mA / 12 ... 30 VDC
	4 = 4 m								A22 = 0 ... 10 V / 12 ... 30 VDC
	5 = 5 m								A33 = 1 kΩ / max. 30 VDC
	6 = 6 m								CC1 = CANopen²⁾
	7 = 7 m								R11 = 2 x 4 ... 20 mA / 12 ... 30 VDC
	8 = 8 m								R22 = 2 x 0 ... 10 V / 12 ... 30 VDC
	9 = 9 m								R33 = 2 x 1 k Ω / max. 30 V
	A = 10 m								RC1 = 2 x CANopen ²⁾
b	Wire types ¹⁾							f	Type of connection / protection level sensor
	1 = V4A, $\varnothing$ 0.5 mm								1 = radial cable, 2 m [6.56'] TPE / IP69k ³⁾
	2 = V4A, $\varnothing$ 1.0 mm (measuring length 3 ... 8 m)								3 = radial M12 connector / IP67
	3 = V4A, $\varnothing$ 1.5 mm (measuring length 3 ... 6 m)								4-pin for sensor type A11 ... A33
									8-pin for sensor type R11 ... R33
c	Linearity								
	1 = 0.5 %								
	2 = 0.25 %								
	3 = 0.1 %								
d	Housing								
	1 = open housing, open wire guide								
	3 = housing with perforated sheet metal cover, open wire guide								
	4 = housing with perforated sheet metal cover, closed wire guide								
	6 = closed housing, closed wire guide								

1) Wire type availability depends on the selected measuring range, refer to the technical data.
2) In preparation, samples available Q4/2017, series availability planned for Q1/2018.

3) Other cable length on request.

Linear measuring technology

**Draw wire mechanics
for outdoor applications**

Draw wire encoder D120


**Measuring length up to 10 m
Linearity up to $\pm 0.1\%$**

Accessories for draw wire encoder

Dimensions in mm [inch]

Order no.

Guide pulley

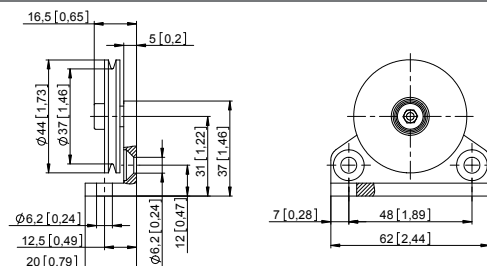

Technical data:

- mounting bracket (anodized alum.)
- guide pulley (plastic POM)
- ball bearing (type 696-2R5)

Scope of delivery:

- 2 x countersunk screws for lateral fixing
- 2 x hexagonal screws for fixing on a flat surface

8.0000.7000.0045

Technical data

General technical data	
Linearity	$\pm 0.5\%$
Improved linearity	$\pm 0.25\%$ or $\pm 0.1\%$
Resolution	see electrical characteristics
Sensor element	potentiometer
Output signal (others on request)	4 ... 20 mA, 0 ... 10 V, potentiometer, CANopen (in preparation)
Redundant output signal	optional for: 4 ... 20 mA, 0 ... 10 V, potentiometer, CANopen (in preparation)
Connection	radial M12 connector or radial cable outlet (TPE cable), standard length 2 m
Protection	IP67, optional IP69k (only with cable outlet)
Humidity	max. 90 % relative, no condensing
Wire pull-out speed	max. 3.0 m/s
Acceleration	max. 50 m/s ²
Weight	1300 ... 1600 g [45.87 ... 56.44 oz] depending on measuring range
Housing	aluminum, spring housing PA6
Spring force	min. 7 N / max. 13 N ¹⁾


Operating principle

Construction

The core of a draw wire device is a drum mounted on bearings, onto which a wire is wound. Winding takes place via a spring-loaded device. The single-layer wire winding ensuring the best linearity possible is a specific feature of Kübler draw wire encoders.

Note

Exceeding the maximum extension length of the draw wire will lead to damage to the wire and the mechanics.



Characteristics measuring wire

V4A, ϕ 0.5 mm	measuring range	3 ... 10 m
	no.	1.4401
	breaking force	280 N
	TK	$16 \times 10^{-6} \text{ K}^{-1}$
V4A, ϕ 1.0 mm	measuring range	3 ... 8 m
	no.	1.4401
	breaking force	942 N
	TK	$16 \times 10^{-6} \text{ K}^{-1}$
V4A, ϕ 1.5 mm	measuring range	3 ... 6 m
	no.	1.4401
	breaking force	1.890 N
	TK	$16 \times 10^{-6} \text{ K}^{-1}$

1) Depends on the measuring length.

Linear measuring technology

Draw wire mechanics for outdoor applications	Draw wire encoder D120	Measuring length up to 10 m Linearity up to $\pm 0.1\%$
---	-------------------------------	---

Electrical characteristics (analog sensor, scaled to measuring range)			
Version	A11 / R11	A22 / R22	A33 / R33
Output	4 ... 20 mA	0 ... 10 V	1 k Ω , potentiometer
Output current	max. 50 mA in case of a failure	max. 10 mA, min. load 10 k Ω	–
Max. current consumption	–	22.5 mA (non load)	–
Power supply	12 ... 30 V DC	12 ... 30 V DC	max. 30 V DC
Response time	< 1 ms from 0 ... 100 % and 100 ... 0 %	< 3 ms from 0 ... 100 % and 100 ... 0 %	–
Resolution	limited by the noise	limited by the noise	theoretically unlimited
Noise	0.03 mA _{pp} = 6 mV _{pp} at 200 Ω	typ. 3 mV _{pp} , max. 37 mV _{pp}	depending on the supply voltage
Recommended slider current	–	–	< 1 μ A
Reverse polarity protection	yes	yes	–
Working temperature	-20°C ... +85°C [-4°F ... +185°F] -40°C ... +85°C [-40°F ... +185°F]	-20°C ... +85°C [-4°F ... +185°F] -40°C ... +85°C [-40°F ... +185°F]	-20°C ... +85°C [-4°F ... +185°F] -40°C ... +85°C [-40°F ... +185°F]
Short circuit proof	–	yes, sustained short-circuit proof	–
Temperature coefficient	0.0079 %/K	0.0037 %/K	± 0.0025 %/K
Connection diagrams			
Electromagnetic compatibility	acc. to EN 61326-1:2006	acc. to EN 61326-1:2006	–
CE compliant acc. to	EMC guideline 2014/30/EU RoHS guideline 2011/65/EU		

Options	
Protection class IP69k	All relevant sensor components are entirely encapsulated. Suitable for steam and high-pressure cleaning (only in connection with cable outlet).
Extended temperature range	The use of special components allows an operating temperature of -40°C ... +85°C [-40°F ... +185°F]
Redundant output signal	The use of a double potentiometer allows the sensor to provide two independent output signals: • 2 x 4 ... 20 mA • 2 x 0 ... 10 V • 2 x 1 kΩ • 2 x CANopen (in preparation)
Wire fastening (with swivel, on ball bearing)	• eyelet, internal diameter 20 mm (standard) • M4 thread, length 22 mm • wire clip
Wire cleaner	In preparation

Order code – extensions for the following options	
Wire fastening M4 ¹⁾	D8.D120.xxxx.xxxx.xxxx.S001
Wire fastening clip	D8.D120.xxxx.xxxx.xxxx.S002
Extended temperature range -40 ... +85°C [-40°F ... +185°F]	D8.D120.xxxx.xxxx.xxxx.S003
Wire fastening M4 and -40 ... +85°C [-40°F ... +185°F]	D8.D120.xxxx.xxxx.xxxx.S004
Wire fastening clip and -40 ... +85°C [-40°F ... +185°F]	D8.D120.xxxx.xxxx.xxxx.S005

¹⁾ Not available with wire type V4A, $\varnothing$ 1,5 mm – order option **b** = 3.

Linear measuring technology

**Draw wire mechanics
for outdoor applications**

Draw wire encoder D120

**Measuring length up to 10 m
Linearity up to $\pm 0.1\%$**

Terminal assignment


Type of connection	Sensor type	M12 connector, 4-pin					
3	A11 (4 ... 20 mA)	Signal:	+V	n.c.	Signal	n.c.	$\perp$
	A22 (0 ... 10 V)	Signal:	+V	Signal	0 V	0 V Signal	$\perp$
	A33 (1 k Ω)	Signal:	+V	Slider	0 V	n.c.	$\perp$
		Pin:	1	2	3	4	PH

Type of connection	Sensor type	M12 connector, 8-pin									
3	R11 (4 ... 20 mA)	Signal:	+V ₁	n.c.	Signal 1	n.c.	+V ₂	n.c.	Signal 2	n.c.	$\perp$
	R22 (0 ... 10 V)	Signal:	+V ₁	Signal 1	0 V ₁	0 V Signal 1	+V ₂	Signal 2	0 V ₂	0 V Signal 2	$\perp$
	R33 (1 k Ω)	Signal:	+V ₁	Slider 1	0 V ₁	n.c.	+V ₂	Slider 2	0 V ₂	n.c.	$\perp$
		Pin:	1	2	3	4	5	6	7	8	PH

Type of connection	Sensor type	Cable (isolate unused wires individually before initial start-up)					
1	A11 (4 ... 20 mA)	Signal:	+V	n.c.	Signal	n.c.	$\perp$
	A22 (0 ... 10 V)	Signal:	+V	Signal	0 V	0 V Signal	$\perp$
	A33 (1 k Ω)	Signal:	+V	Slider	0 V	n.c.	$\perp$
		Core color:	BN	WH	BU	SW	shield

Type of connection	Sensor type	Cable (isolate unused wires individually before initial start-up)									
1	R11 (4 ... 20 mA)	Signal:	+V ₁	n.c.	Signal 1	n.c.	+V ₂	n.c.	Signal 2	n.c.	$\perp$
	R22 (0 ... 10 V)	Signal:	+V ₁	Signal 1	0 V ₁	0 V Signal 1	+V ₂	Signal 2	0 V ₂	0 V Signal 2	$\perp$
	R33 (1 k Ω)	Signal:	+V ₁	Slider 1	0 V ₁	n.c.	+V ₂	Slider 2	0 V ₂	n.c.	$\perp$
		Core color:	WH	BN	GN	YE	GY	PK	BU	RD	shield

Top view of mating side, male contact base



M12 connector, 4-pin



M12 connector, 8-pin

Linear measuring technology

**Draw wire mechanics
for outdoor applications**

Draw wire encoder D120

**Measuring length up to 10 m
Linearity up to $\pm 0.1\%$**

Technology in detail

Various wire types and wire fastenings

Wire types:

- $\varnothing$ 0.5 mm (V4A) ¹⁾
- $\varnothing$ 1.0 mm (V4A)
- $\varnothing$ 1.5 mm (V4A)

Wire fastenings:

Clip

M4 thread

Eyelet ¹⁾




Extension wire

available on request with clip or M4 cable fastening




Application-specific installation possibilities

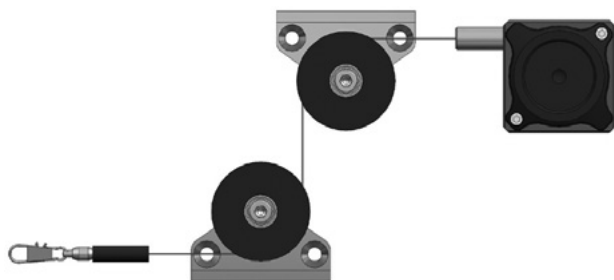

Housing types (the suitable housing type for every application)


Open housing,
open wire guide

For use in the presence of
fine dust and liquids.

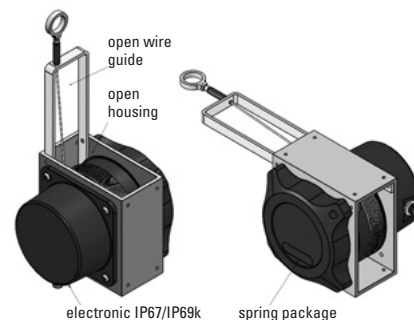

Housing with perforated sheet metal cover,
open wire guide


For use in the presence of
dirt, particles size > 2mm
and liquids

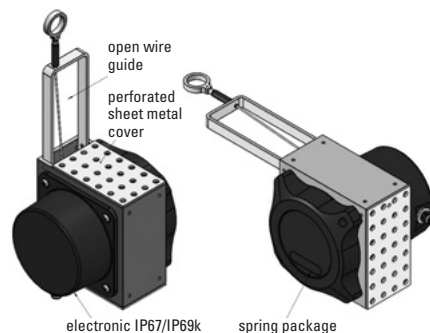

Housing with perforated sheet metal cover,
closed wire guide

For use in the presence of
dirt, particles size > 2mm
and liquids.


Shock protection,
wire cleaning device
(in preparation).

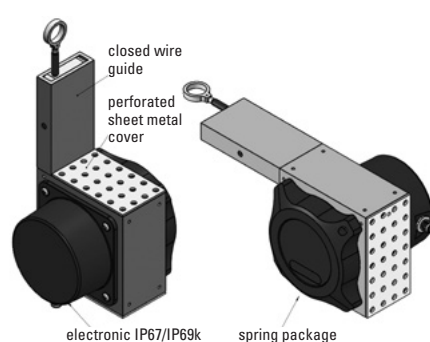

Closed housing ,
closed wire guide

For use in the presence of
sticky dust, cement, concrete,
clay.

Shock protection,
wire cleaning device
(in preparation).

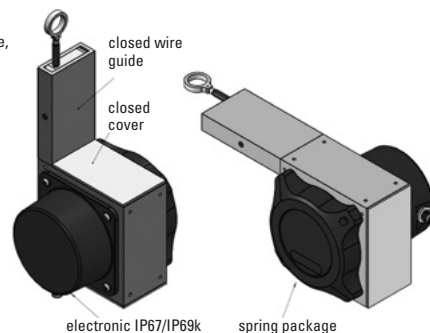

1) Standard.

Linear measuring technology

**Draw wire mechanics
for outdoor applications**



Draw wire encoder D120

**Measuring length up to 10 m
Linearity up to $\pm 0.1\%$**

Dimensions

Dimensions in mm [inch]

**Open housing,
open wire guide**

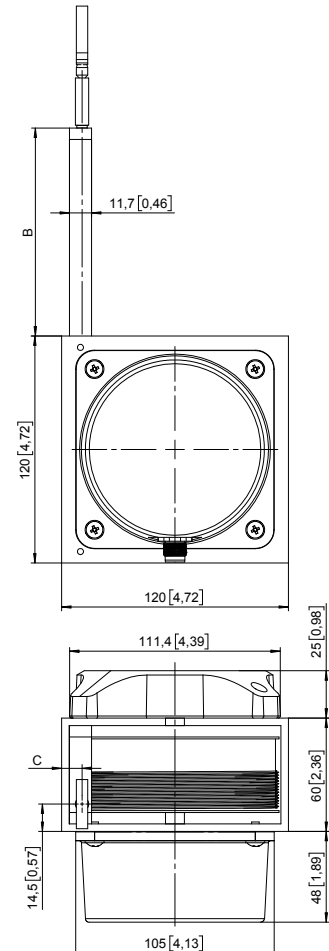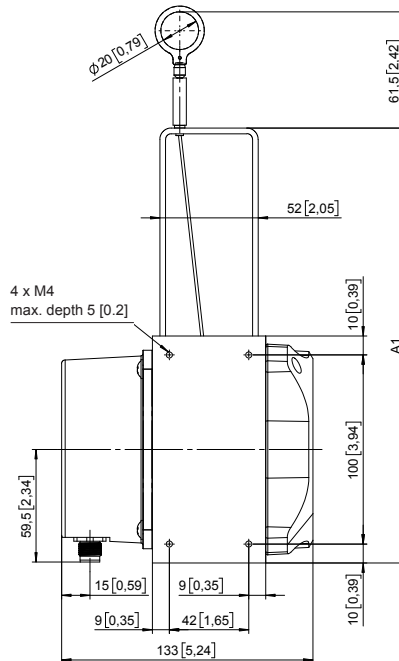


Wire diameter $\varnothing 0.5$ mm – drum pitch circumference: 335.2 [13.2]			
Measuring length	A1	B	C
3 ... 10 m	230 [9.06]	110 [4.33]	10.75 [0.42]

Wire diameter $\varnothing 1.0$ mm – drum pitch circumference: 336.8 [13.26]			
Measuring length	A1	B	C
3 ... 5 m	230 [9.06]	110 [4.33]	10.75 [0.42]
6 ... 8 m	320 [12.6]	200 [7.87]	12.25 [0.48]

Wire diameter $\varnothing 1.5$ mm – drum pitch circumference: 338.3 [13.32]			
Measuring length	A1	B	C
3 ... 4 m	230 [9.06]	110 [4.33]	10.75 [0.42]
5 ... 6 m	320 [12.6]	200 [7.87]	12.25 [0.48]

Connector output / Cable outlet

The cable must be protected in case of steam and high-pressure cleaning.

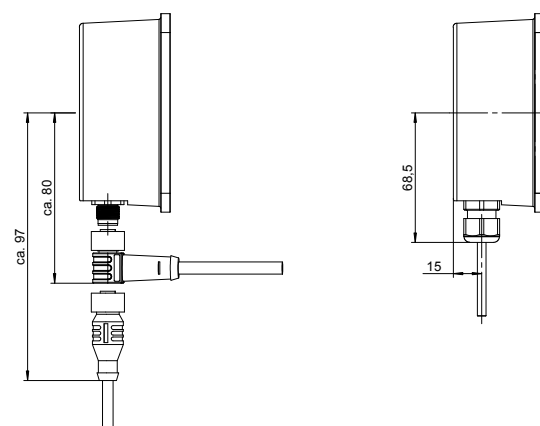

Linear measuring technology

**Draw wire mechanics
for outdoor applications**



Draw wire encoder D120

**Measuring length up to 10 m
Linearity up to $\pm 0.1\%$**

Dimensions

Dimensions in mm [inch]

**Housing with perforated sheet metal cover,
closed wire guide**

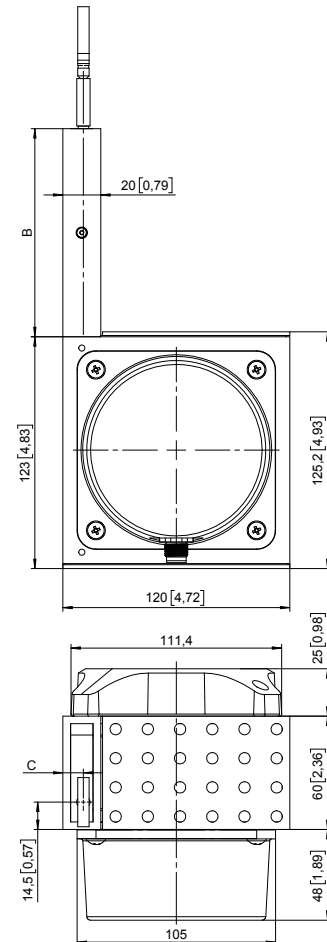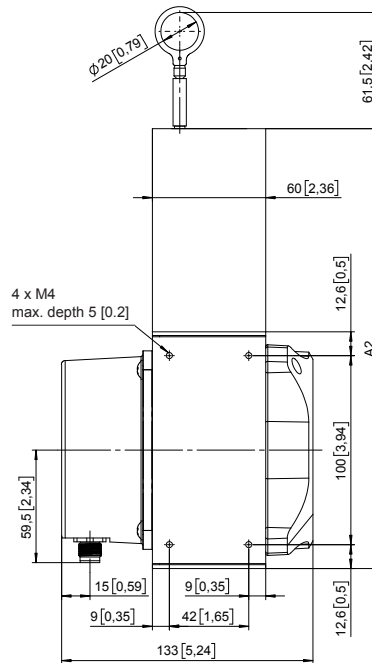

Wire diameter $\varnothing 0.5$ mm – drum pitch circumference: 335.2 [13.2]			
Measuring length	A2	B	C
3 ... 10 m	233 [9.17]	110 [4.33]	10.75 [0.42]

Wire diameter $\varnothing 1.0$ mm – drum pitch circumference: 336.8 [13.26]			
Measuring length	A2	B	C
3 ... 5 m	233 [9.17]	110 [4.33]	10.75 [0.42]
6 ... 8 m	323 [12.7]	200 [7.87]	12.25 [0.48]

Wire diameter $\varnothing 1.5$ mm – drum pitch circumference: 338.3 [13.32]			
Measuring length	A2	B	C
3 ... 4 m	233 [9.17]	110 [4.33]	10.75 [0.42]
5 ... 6 m	323 [12.7]	200 [7.87]	12.25 [0.48]