


# Product Data

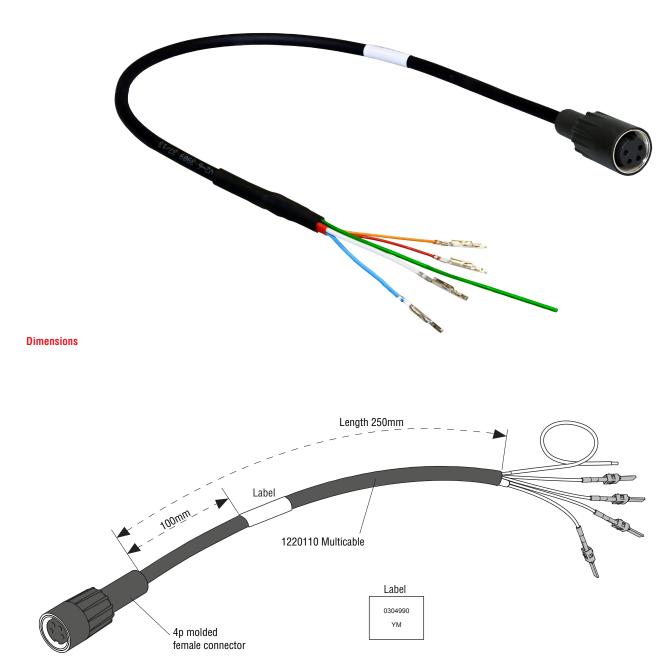

## **TECHNICAL DATA**

# Adapter cable 0,25 PL monitor m4F

### **Description**

Article number 0304990

**Cable** Multicable, Article No. 1220110.

**Diameter** 6mm +0,0/-0,2mm.

Material jacket TPE-U Sh A 85 +/-5; Halogen Free, Color: Black RAL 9005.

Length 260mm.

**Max. Bend radius** 7,5 x Diameter (Static). **Temperature range** -40°C...+85°C.

Connector4pins female molded connector.Weight0.075kg (including package).Installation ManualAvailable; see Manual IM0973450

### Installation

A30	A14
A29	A13
A28	A12
A27	A11
A26	A10
A25	A9
A24	A8
A23	, 10
7120	
A22	
A21	A7
A20	A6
A19	A5
A18	A4
A17	A3
A16	A2
A15	A1

Connec	tions	connector	Α	
C1	C2	C3	Color	Function
A8	A14	A24	Orange	Cam-ctrl
A5	A4	A3	White	Video core
A9	A13	A12	Red	24V/DC
A19	A18	A17	Blue	Video shield/GND
-	-	-	Green	Connect to chassis




Image connector A

### Layout connector A

# 2 3

### Front side of molded female connector

 $\begin{array}{lll} 1 = \text{Coax core} & = \text{Video signal} \\ 2 = \text{Coax screen} & = \text{Video GND} \\ 3 = \text{Red} & = 24\text{V/DC} \\ 4 = \text{Black} & = \text{GND} \end{array}$ 

Shielding Connect to housing

All data subject to change without notice. All dimensions are for commercial purpose only.

The camera/display systems from Orlaco comply with the latest CE, ADR, EMC and mirror-directive regulations, where applicable.

All products are manufactured in accordance with the ISO 9001 quality management system, ISO/TS 16949 quality automotive, ISO 14001 environmental management systems and all Ex products with the IECEx scheme and ATEX directives, where applicable.



