



Identification	Type	LCIS-WP-WUAA-0517-175-S
	Part-No.	750517.0000

Input

	mV, V	mA
Input signal	0–60, 0–100, 0–300, 0–500 mV 0–1, 0–2, 0–5, 0–10, 0–20, 2–10 V adjustable via DIP switch S1	0–5, 0–10, 0–20, 4–20, ± 5 , ± 20 mA adjustable via DIP switch S1
Input resistance	>330 k Ω	<100 Ω
Galvanic insulation I/O	3-way isolation	
Zero /Span	Production comparison	
Transmission frequency	30 Hz at 3 dB	

Load Side

	0/10 V	0–20 mA	4–20 mA
Max. load impedance at I-output		500 Ω	500 Ω
Min. load impedance at U-output	2 k Ω		
Output current	max. 5 mA		
Output voltage	–	max 18 V	max 18 V
Output signal	Adjustable via switch		
Load deviation	bei U-Ausgang max. 5 mV bei 2 k		
Ripple	<20 mV _{eff}		

27.05.2015 – Subject to technical modification

Part-No. 750517.0000

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223

www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU

Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2

www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

General

Nominal voltage	AC/DC 24–240 V
Operation voltage range	DC: 19.2–264 V, AC: 19.2–264 V
Current Consumption per LED	at AC 24V: 19 mA (station supply)
Status Indication	LED green
Input/output protection	Overvoltage AC/DC 264 V, PTC fuse, Output short circuit-proof
Accuracy	0.1 % FSR (23 °C)
Linearity error	0,05 % FSR
Rise time (10 - 90%)	6 ms
Build-up time (Accuracy 1%)	17 ms
Transmission frequency	30 Hz at 3 dB
Temperature coefficient	<150 ppm / K FSR
Insulation voltage input/output	4.0 kV _{eff}
Housing material	PA 6.6 (UL 94 V-0) / NFF I2 F2
Field installation	rail TS 35 (EN 60175)
Protection class	IP 20
Installation position	Optional
Termination	Screw terminal: solid 0.25 – 2.5 mm ² / AWG 20 – 14 fine stranded with ferrule 0.25 – 1.5 mm ² / AWG 20 – 16 Stripping length: 6 mm Screw driver: 3.5 x 0.5 mm
Operation temperature range	-25 °C – 60 °C
Storage temperature range	-40 °C – 80 °C
Dimensions (w × h × d)	17.5 × 93.0 × 73.0 mm
Weight (kg/piece)	0.059 kg/piece
Approvals	UL, CSA, GL in preparation

27.05.2015 – Subject to technical modification

Part-No. 750517.0000

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223

www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU


Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2

www.lutze.com • sales.gb@lutze.co.uk




SYSTEMATIC TECHNOLOGY

Dimensions

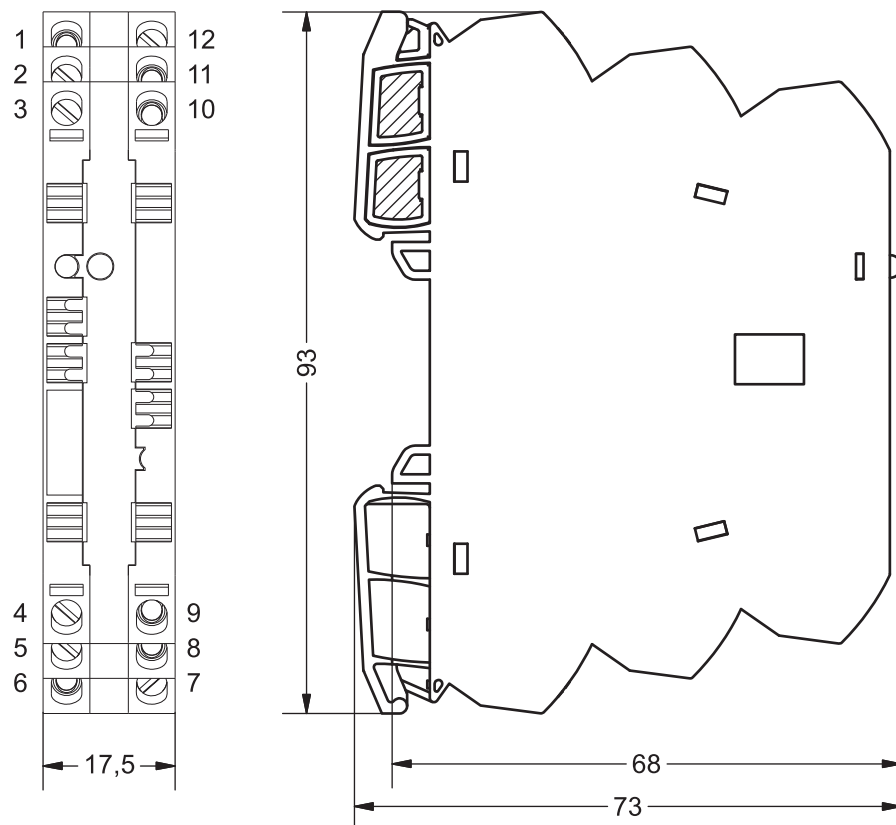

PIN assignment



27.05.2015 – Subject to technical modification

Part-No. 750517.0000

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223

www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU

Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2

www.lutze.com • sales.gb@lutze.co.uk

Range adjustment

S1	Input			
●→Switch On	1	2	3	4
0-60 mV				
0-100 mV	•			
0-300 mV		•		
0-500 mV	•	•		
0-1 V			•	
0-2 V	•		•	
0-5 V		•	•	
0-10 V*	•	•	•	
2-10 V				•
0-20 V	•			•
0-5 mA		•	•	
0-10 mA	•	•	•	
±5 mA			•	•
±20 mA	•		•	•
0-20 mA		•	•	•
4-20 mA	•	•	•	•

S1	Output	
●→Switch On	5	6
0-10 V*	•	
0-20 mA		•
4-20 mA	•	•

Auslieferungszustand: Alle Schalter auf Nullstellung.

*Default

27.05.2015 – Subject to technical modification

Part-No. 750517.0000

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223

www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU

Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2

www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY