

DC-LASTBRYTARE 40A

GA-serie

GAX42040D

Fjärde pol till GA040D

- Upp till 15A 800VDC
- 3/4 poler i serier
- DC21B
- Godkänd som lastfrånskiljare enligt svensk standard EN 60947-3



PRODUKTBESKRIVNING

Kompakt lastfrånskiljare för solcellsapplikationer. Endast 33mm bred för 3P-version.

Möjlighet till 4-poligt utförande genom att montera en 4:e pol.

Upp till 4 hjälpkontakter 1NA+1NC.

Brytarna klarar av att bryta hög DC-spänning och ström.

Lastbrytaren i GA-serien passar främst för mindre solcellsanläggningar eller för enskilda strängar.

Låsbart handtag för direktmanövrering som standard. För tillbehör se länk:

[Huvudbrytare från Lovato - Vred och handtag | OEM Automatic](#)

[Axlar och beröringsskydd GA-serie GAX7055 | OEM Automatic](#)

GA series switch disconnectors



GA040D



GAX42...D

Order code	IEC conventional free air thermal current Ith	IEC rated operational current Ie DC21B			Qty per pkg	Wt
		Poles in series				
		3 poles	4 poles			
		500V	600V	800V		
	[A]	[A]	[A]	[A]	n°	[kg]
Switch disconnecter complete with black handle.						
GA040D	40	12	—	—	1	0.135
Fourth pole.						
GAX42040D	40	—	20	15	1	0.040

① Connection of 4 poles in series.


② For other operational voltages, refer to technical characteristics on page 12-73.

TEKNISK DATA

Märkström Ie (DC21B/600 V) 4 poler i serie 20 A

Märkström Ie (DC21B/800 V) 4 poler i serie 15 A

Termisk ström Ith 40 A

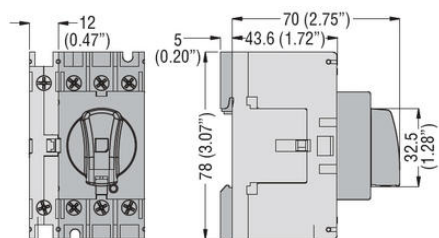

GAX41 040A, GAX42 040A...
GAX41 063SA, GAX42 063SA,
GAX42 040D, GAX31 A, GAX33 A